

SUBMERSIBLE PUMPS

Outstanding Features

- Oil Bathed Double Mechanical Seals
Allows for Periods of Dry Run
- Lightweight, Compact, and Easy to Carry.
- Thermal Protected Motors
- Non-Toxic DTE 24 Light Paraffin Oil
- PKS, Trash Submersible handles up to 5/8" Solids
- PX, PXL, Discharge Flanges Can be mounted Horizontally or Vertically
- PX, PXL, Internals are Rubber Composite Providing Maximum Erosion Resistance
Three Times more Resistant than Cast Iron
- PXL, Complete Drainage, Pumps Down to 1/8"
- Completely Rebuildable
- Single Piece Molded Power Cords
Ensures a Water Tight Seal
- Optional Float Switches Available for All Models
- One Year Limited Warranty

Lynco Lynco Products Inc
114, 1220 - 28 STREET N.E.
CALGARY, AB T2A 6A2
403-250-3600 / 1-877-249-3600
sales@lynco.com / www.lynco.com



PX-65011



PXL-65011




PS-65011



PKS-65011

PERFORMANCE CURVES

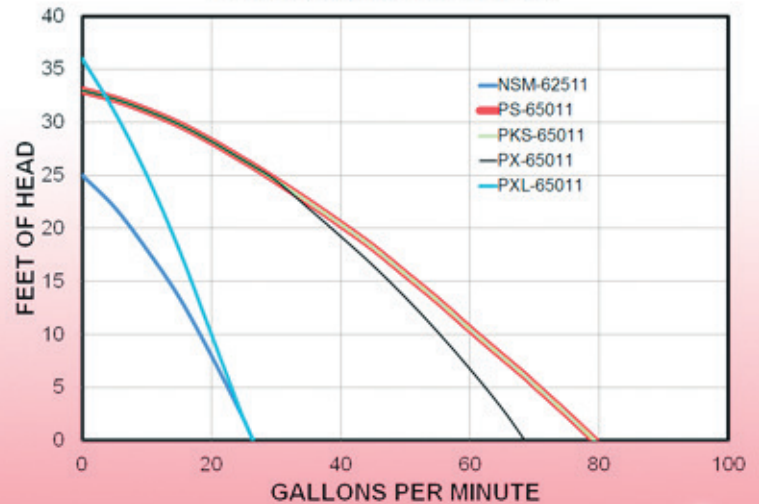

NSM-62511

	NSM-62511	PS-65011	PKS-65011	PX-65011	PXL-65011
Discharge Size	¾"-1" NPT	2" NPT	2" NPT	2" NPT	¾"-2" NPT
Maximum Output (GPH)	1584	4760	4760	4110	1500
Max Discharge Head (ft)	25	33	33	33	36
Voltage	110	110	110	110	110
Rated Current (Amp)	2.2	7	7	6.4	6.4
Motor Output (Hp)	1/8	1/2	1/2	1/2	1/2
Cable Length (ft)	15	20	20	20	20
Packaged Weight (Lbs)	8	29	36	25	26
Min Diameter Hole (in)	6¾"	9¾"	9¾"	7¾"	7¾"
Pack Dimensions (LxWxH)	7"x7"x11"	10"x10"x15"	10"x10"x17"	8"x8"x13"	8"x8"x13"

SUBMERSIBLE PUMPS

Outstanding Features

- Oil Bathed Double Mechanical Seals, Allows for Periods of Dry Run
- Lightweight, Compact, and Easy to Carry.
- Non-Toxic DTE 24 Light Paraffin Oil
- Fits into Small Diameter Holes
- Thermal Protected Motors
- Completely Rebuildable Pumps
- Single Piece Molded Power Cords, Ensures a Water Tight Seal
- Optional Float Switches Available for All Models
(PB-68011 must be wired for 220v to utilize FS-30 Float Switch)
- One Year Limited Warranty




PB-65011



PB-68011

PERFORMANCE CURVES

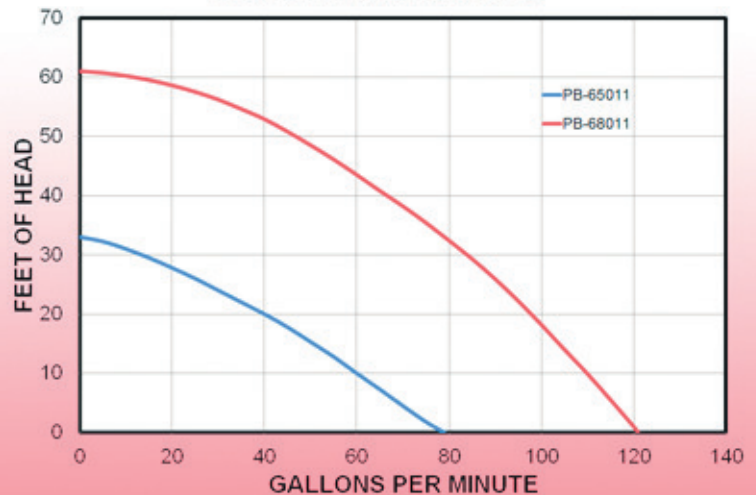

	PB-65011	PB-68011
Discharge Size	2" NPT	3" NPT
Maximum Output (GPH)	4760	7286
Max Discharge Head (ft)	33	61
Voltage	110	110 / 220
Rated Current (Amp)	7.2	30 / 15
Motor Output (Hp)	1/2	2
Cable Length (ft)	20	40
Packaged Weight (Lbs)	36	60
Minimum Diameter Hole (in)	7¾"	9½"
Pack Dimensions (LxWxH)	8"x8"x17"	10"x10"x25"